



FW-F ZIDNI FAN-COIL

GREJANJE I HLAĐENJE



FW-F zidni Fan-coil

Unapredite svoj sistem grejanja i hlađenja
- izaberite fleksibilnost i efikasnost!





Ključne Karakteristike:

- ORMARIĆ (ABS): Moderan dizajn, ABS materijal.
- REŠETKE ZA DOVOĐENJE VAZDUHA: Automatsko otvaranje/zatvaranje, ručno podešavanje protoka vazduha.
- DRŽAČ ZA MONTAŽU (GALVANIZOVANI ČELIK): Debeli galvanizovani čelik, rupe za zidnu montažu.
- IZMENJIVAČ TOPLOTE (VODENI KOLING): Bakarne cevi, aluminijumska rebra, testiran pod pritiskom.
- SEKCIJA VENTILATORA (VENTILATOR SA 3 BRZINE): Tangencijalni ventilator, montiran na elastičnim nosačima.
- FILTER VAZDUHA (VISOKA EFIKASNOST): Lako uklonjiv, visokoefikasno polipropilensko tkanje.
- ELEKTRIČNA OPREMA (ELEKTRONSKA KARTA): Mikroprocesor, senzor za nisku temperaturu vode, LED indikatori.

Serija proizvoda		 Fan motor	 [kW]	 [kW]	 [m3/h]	 ESP [Pa]
	FW-F	AC~230V- Standard 3Brz./Brzina	2,3÷4,6	5,1÷10,0	410÷1.860	/



FW-F

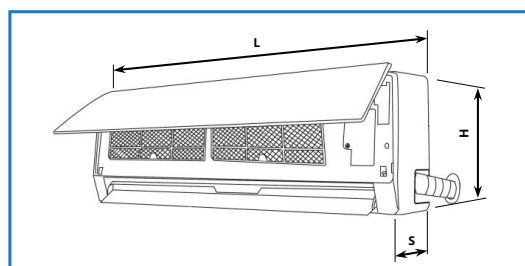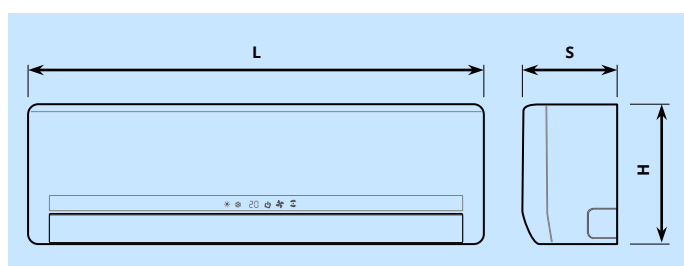

Nominalni tehnički podaci (jedinice dvocevnog sistema)

Mod.	FW..F	FW 230F	FW 430F	FW 1230F
Kapacitet hlađenja	Total W	2.380	2.700	4.600
Senzibilni	W	1.850	2.500	3.690
Kapacitet grejanja	W	5.100	6.600	10.000
Nominalni protok vazduha	m ³ /h	410	560	860
Protok vode	Hlađenje l/h	409	464	791
	Grejanje l/h	439	568	860
Padovi pritiska vode	Hlađenje l/h	10,8	17,6	39,5
	Grejanje l/h	9,7	20,5	36,4
Nivoi buke	Min-Med-Max dB(A)	20 - 24 - 29	21 - 25 - 32	32 - 36 - 39
Ref. FAN-DECK		1x SD100x650, C1-3V, [P1-2-3], [N1-2-3] AC, 4P, IP42, CL130, 3V, TH, SCU	1x SD100x650, C1-3V, [P1-2-3], [N1-2-3] AC, 4P, IP42, CL130, 3V, TH, SCU	1x SD100x740, C1,5-3V, [P1-2-3], [N1-2-3] AC, 4P, IP42, CL130, 3V, TH, SCU
Motori/Ventilatori	No./No.	1/1	1/1	1/1
Broj brzine	No.	3	3	3
Nominalna ulazna struja	MAX W	30 W	30 W	50 W
	MAX A	0,13 A	0,16 A	0,22 A
Napajanje		230Vac-IPh-50/60Hz		230Vac-IPh-50/60Hz
Dimenzije	L mm	850	850	940
	H mm	230	230	300
	S mm	120	120	200
Grejno/hladni blok	Zapremina vode (l)	0,81	0,83	1,44
	Redovi No.	3R	3R	3R
	Vodne veze DN(*)	DN.12 mm (ext.)	DN.12 mm (ext.)	DN.12 mm (ext.)
Odvodna cev	(mm)	16	16	16
Neto težina	kg	10,5	11,0	13,0
 SMANJENJE PROTOKA VAZDUHA	Max	1,00	1,00	1,00
	Med	0,80	0,80	0,80
	Min	0,66	0,66	0,69
Preporučeni dodaci		Daljinski upravljač - I.R. kontrola (TEL54)		

Grejanje / Temperatura vazduha 20°C, temperaturni režim vode 70°C / 60°C
Hlađenje / Ulazna temperatura vazduha 27°C, izlazna temperatura vazduha, 19°C
 Temperaturni režim vode 7°C / 12°C

**SMGS DOO**

Profesionalna rešenja za ventilaciju i klimatizaciju

Gavrila Principa 11
Novi Sad,
Srbija

Tel: +381 21 6616 539
Tel/Fax: +381 21 6616 467

info@smgs.rs

Posetite naš website
www.smgs.rs

