



FXE-S FAN-COIL

GREJANJE I HLAĐENJE



EC SUPER-TIHI: Proizvod namenjen svim korisnicima koji žele uživati u klimatizaciji bez smetnji od buke

Unapredite svoj sistem grejanja i hlađenja - izaberite fleksibilnost i efikasnost!



Ključne Karakteristike:

- Proizvod posebno dizajniran za minimalizaciju buke
- Za tihe prostorije poput spavaćih soba, hotela sa 5 zvezdica i luksuznih stanova.
- Za obaveznu tišinu u prostorijama kao što su snimateljske sobe, pozorišta i biblioteke.
- Visoka energetska efikasnost i ekološka prihvatljivost.
- Modulacija protoka vazduha za prilagođavanje potrebama prostorije.
- Inverter sa podešavanjem brzine i alarmnim suvim kontaktom.
- Smanjena buka, termo-akustična i antivibraciona izolacija, detaljno testiranje.

Serija proizvoda	 Fan motor	 [kW]	 [kW]	 [m3/h]	 ESP [Pa]
 FXE-S	Super tihi, bez četkica sa motorom EC~230V (modulirajući)	1,4÷9,8	3,5÷21,1	340÷1.680	Max 45




Technical drawing of the Vario 1000 caravan, showing side and front views with dimensions and labels.

Dimensions:

- Overall length: L
- Overall width: B
- Overall height: H = 520
- Front width: S = 220
- Side view dimensions (from left to right): 155, 105, 40, 120, 135, 230, 90, 120, 115.
- Internal height: 25
- Internal width: =

Labels:


- Levak za odvod kondenzata (Condensate drain lever)
- Nogare (opciono) (Legs (optional))
- Usisnik vazduha sa nosačem za nogare i rešetkom (Verzija VC - HC) (Air intake with support for legs and grille (Version VC - HC))

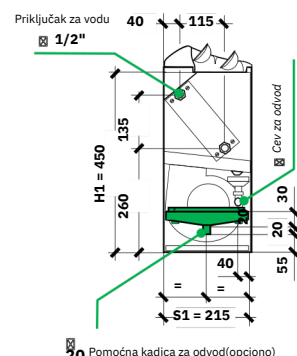

2 Ceviri

Veličina		FXE-S	130S	230S	330S	430S	530S	630S	730S	830S	930S	1030S	1130S	1230S
Kapacitet hlađenja	Total	W	1.430	1.910	2.380	2.820	3.600	4.070	5.230	6.080	6.860	8.240	8.780	9.790
	Senzibilni	W	1.220	1.540	1.920	2.130	2.740	3.070	4.070	4.510	5.090	5.960	6.890	7.540
Kapacitet grejanja		W	3.540	4.670	5.580	6.220	7.800	9.010	11.320	12.540	14.030	16.430	19.200	21.100
Nominalni protok vazduha		m3/h	340	370	450	490	625	670	915	960	1.100	1.130	1.655	1.680
Protok vode	Hlađenje	l/h	246	329	409	485	619	700	900	1.046	1.180	1.417	1.510	1.684
	Grejanje	l/h	304	402	480	535	671	775	974	1.078	1.207	1.413	1.651	1.815
Padovi pritiska vode	Hlađenje	kPa	11,9	14,9	16,3	18,1	20,8	22,1	22,0	24,3	23,9	24,4	25,9	27,9
	Grejanje	kPa	14,2	17,3	17,5	17,1	19,1	21,1	20,1	20,2	19,5	18,9	24,2	25,3
Nivoi buke		Min-Med-Max dB(A)	<10-17-30	<10-18-31	<10-22-34	10-22-36	11-21-30	12-22-31	11-26-35	12-28-36	<10-27-39	10-28-40	11-30-40	12-31-41
Ref. FAN-DECK			SWP/STD./7, SWD/STD./7		SWP/STD./7, SWD/STD./7		SWP/STD./7, SWD/STD./7		SWP/STD./8, SWD/STD./8		SWP/STD./9, SWD/STD./9		SWP/FIX./10, SWD/FIXD2./10	
Motori/Ventilatori		No.	1/1		1/1		1/2		1/2		1/2		1/3	
Nominalna ulazna struja		MAX W MAX A	55 W 0,35 A		65 W 0,45 A		85 W 0,55 A		90 W 0,55 A		90 W 0,55 A		180 W 1,30 A	
Napajanje			230Vac-1Ph-50/60Hz (Signal 0..10Vdc)											
Grejno/hladni blok		Zapremina vode (l)	0.69	0.70	0.99	1.01	1.30	1.31	1.60	1.62	1.91	1.92	2.21	2.23
		[Rangh], DN(*) – [rows], DN(*)	[3R], 1/2" F		[3R], 1/2" F		[3R], 1/2" F		[3R], 1/2" F		[3R], 1/2" F		[3R], 1/2" F	
Odvodna cev		Ø φ (mm)	20		20		20		20		20		20	
Osnovne dimenzije	L	mm	670		870		1.070		1.270		1.470		1.670	
	H	mm	470		470		470		470		470		470	
	S	mm	220		220		220		220		220		220	
	A	mm	400		600		800		1.000		1.200		1.400	
	B	mm	425		625		825		1.025		1.225		1.425	
Donja radna granica		LFI ESP = 0 Pa	10V Med 1V	1,00 0,66 0,33	1,00 0,66 0,33	1,00 0,66 0,32	1,00 0,66 0,32	1,00 0,70 0,40	1,00 0,66 0,40	1,00 0,66 0,32	1,00 0,63 0,26	1,00 0,63 0,26	1,00 0,64 0,28	1,00 0,64 0,28
 SMANJENJE PROTOKA VAZDUHA Koefficienti koji definišu dijagrame "Protok vazduha / Statički pritisak" (na 3 brzine Maks-Sred- Min)	15 Pa	10V Med 1V	0,92 0,61 0,30	0,92 0,61 0,30	0,92 0,61 0,29	0,92 0,61 0,29	0,90 0,63 0,36	0,90 0,63 0,36	0,90 0,59 0,29	0,90 0,59 0,29	0,92 0,58 0,23	0,92 0,58 0,23	0,95 0,61 0,26	0,95 0,61 0,26
	30 Pa	10V Med 1V	0,82 0,54 0,27	0,82 0,54 0,27	0,83 0,55 0,26	0,83 0,55 0,26	0,79 0,55 0,32	0,79 0,55 0,32	0,79 0,52 0,26	0,79 0,52 0,26	0,82 0,51 0,21	0,82 0,51 0,21	0,88 0,57 0,25	0,88 0,57 0,25
	45 Pa	10V Med 1V	0,67 0,45 0,22	0,67 0,45 0,22	0,71 0,47 0,22	0,71 0,47 0,22	0,65 0,46 0,26	0,65 0,46 0,26	0,67 0,44 0,21	0,67 0,44 0,21	0,69 0,43 0,18	0,69 0,43 0,18	0,81 0,52 0,22	0,81 0,52 0,22
	LFS	ESP (Pa) Qa (x m3/h)	10V	72 Pa x 0,20	72 Pa x 0,20	79 Pa x 0,20	80 Pa x 0,20	85 Pa x 0,20	85 Pa x 0,20	86 Pa x 0,20	86 Pa x 0,20</			

Grejanje / Temperatura vazduha 20°C, temperaturni režim vode 70°C / 60°C
Hlađenje / Ulazna temperatura vazduha 27°C, izlazna temperatura vazduha, 19°C
 Temperaturni režim vode 7°C / 12°C

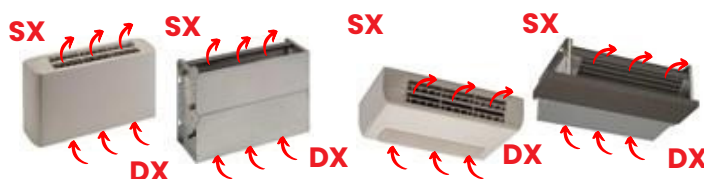

Navedite stranu priključaka za vodu



- SX = Levo (STANDARD)
- DX = Desno

Veličina	FXE-s	130S	230S	330S	430S	530S	630S	730S	830S	930S	1030S	1130S	1230S
Ukupni kapacitet hlađenja	W	1.430	1.910	2.380	2.820	3.600	4.070	5.230	6.080	6.860	8.240	8.780	9.790
Ukupni kapacitet grejanja	W	3.540	4.670	5.580	6.220	7.800	9.010	11.320	12.540	14.030	16.430	19.200	21.100
Protok vazduha	m ³ / h	340	370	450	490	625	490	915	960	1.100	1.130	1.655	1.680
Nivo buke	Min-Med-Max dB(A)	<10-17-30	<10-18-31	<10-22-34	10-22-36	11-21-30	12-22-31	11-26-35	12-28-36	<10-27-39	10-28-40	11-30-40	12-31-41
VA Vertikalna verzija za montažu na zid (osnovna maska)													
	Mod.	FXE-VA 130S	FXE-VA 230S	FXE-VA 330S	FXE-VA 430S	FXE-VA 530S	FXE-VA 630S	FXE-VA 730S	FXE-VA 830S	FXE-VA 930S	FXE-VA 1030S	FXE-VA 1130S	FXE-VA 1230S
	(*) kg L x H x S	14,1 670 x 520 x 220	14,6 670 x 520 x 220	17,5 870 x 520 x 220	18,3 870 x 520 x 220	23,9 1.070 x 520 x 220	24,9 1.070 x 520 x 220	26,9 1.270 x 520 x 220	28,4 1.270 x 520 x 220	30,1 1.470 x 520 x 220	31,6 1.470 x 520 x 220	33,7 1.670 x 520 x 220	37,2 1.670 x 520 x 220
VB Vertikalna verzija za montažu na pod (maska sa rešetkom za usis vazduha sa prednje strane)													
	Mod.	FXE-VB 130S	FXE-VB 230S	FXE-VB 330S	FXE-VB 430S	FXE-VB 530S	FXE-VB 630S	FXE-VB 730S	FXE-VB 830S	FXE-VB 930S	FXE-VB 1030S	FXE-VB 1130S	FXE-VB 1230S
	(*) kg L x H x S	14,4 670 x 520 x 220	14,9 670 x 520 x 220	18,0 870 x 520 x 220	18,8 870 x 520 x 220	24,6 1.070 x 520 x 220	25,6 1.070 x 520 x 220	27,8 1.270 x 520 x 220	29,3 1.270 x 520 x 220	31,2 1.470 x 520 x 220	32,7 1.470 x 520 x 220	35,0 1.670 x 520 x 220	38,5 1.670 x 520 x 220
HA Horizontalna verzija za plafonsku montažu (osnovna maska)													
	Mod.	FXE-HA 130S	FXE-HA 230S	FXE-HA 330S	FXE-HA 430S	FXE-HA 530S	FXE-HA 630S	FXE-HA 730S	FXE-HA 830S	FXE-HA 930S	FXE-HA 1030S	FXE-HA 1130S	FXE-HA 1230S
	(*) kg L x H x S	15,3 670 x 520 x 220	15,8 670 x 520 x 220	19,1 870 x 520 x 220	19,9 870 x 520 x 220	25,9 1.070 x 520 x 220	26,9 1.070 x 520 x 220	29,3 1.270 x 520 x 220	30,8 1.270 x 520 x 220	32,9 1.470 x 520 x 220	34,4 1.470 x 520 x 220	36,9 1.670 x 520 x 220	40,4 1.670 x 520 x 220
HB Horizontalna verzija za plafonsku montažu (maska sa rešetkom za usis vazduha sa prednje strane)													
	Mod.	FXE-HB 130S	FXE-HB 230S	FXE-HB 330S	FXE-HB 430S	FXE-HB 530S	FXE-HB 630S	FXE-HB 730S	FXE-HB 830S	FXE-HB 930S	FXE-HB 1030S	FXE-HB 1130S	FXE-HB 1230S
	(*) kg L x H x S	15,6 670 x 520 x 220	16,1 670 x 520 x 220	19,6 870 x 520 x 220	20,4 870 x 520 x 220	26,6 1.070 x 520 x 220	27,6 1.070 x 520 x 220	30,2 1.270 x 520 x 220	31,7 1.270 x 520 x 220	34,0 1.470 x 520 x 220	35,5 1.470 x 520 x 220	38,2 1.670 x 520 x 220	41,7 1.670 x 520 x 220
CA Vertikalna ugradna verzija (osnovna; bez maske)													
	Mod.	FXE-CA 130S	FXE-CA 230S	FXE-CA 330S	FXE-CA 430S	FXE-CA 530S	FXE-CA 630S	FXE-CA 730S	FXE-CA 830S	FXE-CA 930S	FXE-CA 1030S	FXE-CA 1130S	FXE-CA 1230S
	(*) kg L x H x S	11,3 450 x 450 x 215	11,8 450 x 450 x 215	14,6 650 x 450 x 215	15,4 650 x 450 x 215	20,9 850 x 450 x 215	21,9 850 x 450 x 215	23,8 1.050 x 450 x 215	25,3 1.050 x 450 x 215	26,9 1.250 x 450 x 215	28,4 1.250 x 450 x 215	30,4 1.450 x 450 x 215	33,9 1.450 x 450 x 215
CB Vertikalna ugradna verzija (usis vazduha sa prednje strane; bez maske)													
	Mod.	FXE-CB 130S	FXE-CB 230S	FXE-CB 330S	FXE-CB 430S	FXE-CB 530S	FXE-CB 630S	FXE-CB 730S	FXE-CB 830S	FXE-CB 930S	FXE-CB 1030S	FXE-CB 1130S	FXE-CB 1230S
	(*) kg L x H x S	11,2 450 x 450 x 215	11,7 450 x 450 x 215	14,5 650 x 450 x 215	15,3 650 x 450 x 215	20,8 850 x 450 x 215	21,8 850 x 450 x 215	23,6 1.050 x 450 x 215	25,1 1.050 x 450 x 215	26,7 1.250 x 450 x 215	28,2 1.250 x 450 x 215	30,2 1.450 x 450 x 215	33,7 1.450 x 450 x 215
CH Horizontalna ugradna verzija (osnovna; bez maske) - Kosno nadole izvlačenje filtera, usis vazduha NIJE za kanalisanje													
	Mod.	FXE-CH 130S	FXE-CH 230S	FXE-CH 330S	FXE-CH 430S	FXE-CH 530S	FXE-CH 630S	FXE-CH 730S	FXE-CH 830S	FXE-CH 930S	FXE-CH 1030S	FXE-CH 1130S	FXE-CH 1230S
	(*) kg L x H x S	11,7 545 x 450 x 215	12,2 545 x 450 x 215	15,0 745 x 450 x 215	15,8 745 x 450 x 215	21,3 945 x 450 x 215	22,3 945 x 450 x 215	24,2 1.145 x 450 x 215	25,7 1.145 x 450 x 215	27,3 1.345 x 450 x 215	28,8 1.345 x 450 x 215	30,8 1.545 x 450 x 215	34,3 1.545 x 450 x 215
CK Horizontalna ugradna verzija (usis vazduha sa prednje strane; bez maske)													
	Mod.	FXE-CK 130S	FXE-CK 230S	FXE-CK 330S	FXE-CK 430S	FXE-CK 530S	FXE-CK 630S	FXE-CK 730S	FXE-CK 830S	FXE-CK 930S	FXE-CK 1030S	FXE-CK 1130S	FXE-CK 1230S
	(*) kg L x H x S	11,6 545 x 450 x 215	12,1 545 x 450 x 215	14,9 745 x 450 x 215	15,7 745 x 450 x 215	21,2 945 x 450 x 215	22,2 945 x 450 x 215	24,0 1.145 x 450 x 215	25,5 1.145 x 450 x 215	27,1 1.345 x 450 x 215	28,6 1.345 x 450 x 215	30,6 1.545 x 450 x 215	34,1 1.545 x 450 x 215

- (*) kg = Neto težina (samo jedinica, bez pakovanja)
- L x H x S = Dužina x Visina x Dubina (dimenzije u mm)



FXE-S(VA)

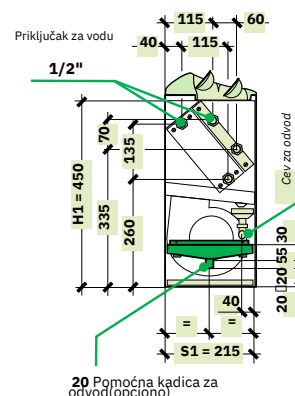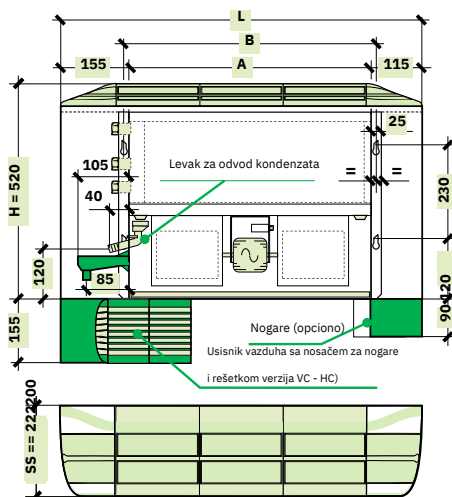

Verzija sa maskom

H = 520 mm
S = 220 mm



Signal
0-10V



4
Cevi

Nominalni tehnički podaci (EC motor supertihne četvorocevne jedinice)

Veličina		FX-S	131S	231S	331S	431S	531S	631S	731S	831S	931S	1031S	1131S	1231S
Kapacitet hlađenja	Total	W	1.390	1.850	2.310	2.730	3.490	3.920	5.090	8.060	6.730	8.060	8.610	9.620
	Senzibilni	W	1.180	1.490	1.870	2.050	2.640	2.950	3.940	5.810	4.980	5.810	6.740	7.390
Kapacitet grejanja		W	1.800	1.880	2.960	3.120	4.180	4.330	5.920	7.380	7.270	7.380	10.080	10.200
Nominalni protok vazduha		m3/h	325	350	430	465	595	630	875	920	1.065	1.090	1.600	1.630
Protok vode	Hlađenje	l/h	239	318	430	470	600	674	875	1.018	1.158	1.386	1.481	1.655
	Grejanje	l/h	239	162	255	268	359	372	509	526	625	635	867	877
Padovi pritiska vode	Hlađenje	kPa	11,2	14,0	15,4	17,0	19,6	20,5	20,8	23,0	22,9	23,3	24,9	26,9
	Grejanje	kPa	6,7	7,2	10,1	11,2	19,4	20,8	36,4	38,9	31,2	32,2	40,0	41,0
Nivoi buke		Min-Med-Max dB(A)	<10-17-30	<10-18-31	<10-22-34	10-22-36	11-21-30	12-22-31	11-26-35	12-28-36	<10-27-39	10-28-40	11-30-40	12-31-41
Ref. FAN-DECK			SWP/STD.1/7, SWD/STD.1/7		SWP/STD.1/7, SWD/STD.1/7		SWP/STD.1/7, SWD/STD.1/7		SWP/STD.1/8, SWD/STD.1/8		SWP/STD.1/9, SWD/STD.1/9		SWP/STD.1/10, SWD/STD.1/10	
Motori/Ventilatori		No.	1/1		1/1		1/2		1/2		1/2		1/3	
Nominalna ulazna struja	MAX W	W	55 W		65 W		85 W		90 W		90 W		180 W	
	MAX A	A	0,35 A		0,45 A		0,55 A		0,55 A		0,55 A		1,40 A	
Napajanje			230Vac-1Ph-50/60Hz (Signal 0..10Vdc)											
Grejno/hladni blok	Zapremina vode	(l)	0.69	0.70	0.99	1.01	1.30	1.31	1.60	1.62	1.91	1.92	2.21	2.23
	[Ranghi], DN(*) - [Rows], DN(*)		[3R], 1/2" F		[3R], 1/2" F		[3R], 1/2" F		[3R], 1/2" F		[3R], 1/2" F		[3R], 1/2" F	
Grejna spirala	Zapremina vode	(l)	0,23		0,33		0,43		0,54		0,64		0,74	
	[Ranghi], DN(*) - [Rows], DN(*)		[1R], 1/2" F		[1R], 1/2" F		[1R], 1/2" F		[1R], 1/2" F		[1R], 1/2" F		[1R], 1/2" F	
Odvodna cev		Ø φ (mm)	20		20		20		20		20		20	
Osnovne dimenzije	L	mm	670		870		1.070		1.270		1.470		1.670	
	H	mm	470		470		470		470		470		470	
	S	mm	220		220		220		220		220		220	
	A	mm	400		600		800		1.000		1.200		1.400	
	B	mm	425		625		825		1.025		1.225		1.425	
Donja radna granica	LFI	10V	1,00	1,00	1,00	1,00	1,00	1,00	1,00	1,00	1,00	1,00	1,00	1,00
	ESP = 0 Pa	Med	0,66	0,66	0,66	0,66	0,70	0,70	0,66	0,66	0,63	0,63	0,64	0,64
		1V	0,33	0,33	0,32	0,32	0,40	0,40	0,32	0,32	0,26	0,26	0,28	0,28
 SMANJENJE PROTOKA VAZDUHA Koefficienti koji definišu dijagrame "Protok vazduha / Statistički pritisak" (na 3 brzine Maks-Sred-Min)	15 Pa	10V	0,92	0,92	0,92	0,92	0,90	0,90	0,90	0,90	0,92	0,92	0,95	0,95
		Med	0,61	0,61	0,61	0,61	0,63	0,63	0,59	0,59	0,58	0,58	0,61	0,61
		1V	0,30	0,30	0,29	0,29	0,36	0,36	0,29	0,29	0,24	0,24	0,26	0,26
	30 Pa	10V	0,82	0,82	0,83	0,83	0,79	0,79	0,79	0,79	0,82	0,82	0,88	0,88
		Med	0,54	0,54	0,55	0,55	0,55	0,55	0,52	0,52	0,51	0,51	0,57	0,57
		1V	0,27	0,27	0,55	0,55	0,32	0,32	0,26	0,26	0,21	0,21	0,24	0,25
	45 Pa	10V	0,67	0,67	0,71	0,71	0,65	0,65	0,67	0,67	0,69	0,69	0,81	0,81
		Med	0,45	0,45	0,47	0,47	0,46	0,46	0,44	0,44	0,43	0,43	0,52	0,52
		1V	0,22	0,22	0,22	0,22	0,26	0,26	0,21	0,21	0,18	0,18	0,22	0,22
LFS	ESP (Pa)	10V	72 Pa	72 Pa	80 Pa	80 Pa	85 Pa	85 Pa	86 Pa	86 Pa	83 Pa	83 Pa	107 Pa	107 Pa
	Qa (x m3/h)		x 0,20	x 0,20	x 0,20	x 0,20	x 0,20	x 0,20	x 0,20	x 0,20	x 0,20	x 0,20	x 0,20	x 0,20
	ESP (Pa)	Med	68 Pa	68 Pa	77 Pa	77 Pa	79 Pa	79 Pa	79 Pa	79 Pa	76 Pa	76 Pa	100 Pa	100 Pa
Gornja radna granica	Qa (x m3/h)		x 0,19	x 0,19	x 0,20	x 0,20	x 0,19	x 0,19	x 0,19	x 0,19	x 0,19	x 0,19	x 0,19	x 0,19
	ESP (Pa)	IV	55 Pa	55 Pa	61 Pa	61 Pa	66 Pa	66 Pa	60 Pa	60 Pa	52 Pa	52 Pa	73 Pa	73 Pa
	Qa (x m3/h)		x 0,17	x 0,17	x 0,17	x 0,17	x 0,17	x 0,17	x 0,17	x 0,17	x 0,16	x 0,16	x 0,17	x 0,17

Grejanje / Temperatura vazduha 20°C, temperaturni režim vode 70°C / 60°C
Hlađenje / Ulazna temperatura vazduha 27°C, izlazna temperatura vazduha, 19°C
Temperaturni režim vode 7°C / 12°C



Navedite stranu priključaka za vodu

- SX = Levo (STANDARD)
- DX = Desno

Veličina	FXE-P	131S	231S	331S	431S	531S	631S	731S	831S	931S	1031S	1131S	1231S
Ukupni kapacitet hlađenja	W	1.390	1.850	2.310	2.730	3.490	3.920	5.090	5.920	6.730	8.060	8.610	9.620
Ukupni kapacitet grejanja	W	1.800	1.880	2.960	3.120	4.180	4.330	5.920	6.120	7.270	7.380	10.080	10.200
Protok vazduha	m ³ / h	325	350	430	465	595	630	875	920	1.065	1.090	1.600	1.630
Nivo buke	Min-Med-Max dB(A)	<10-17-30	<10-18-31	<10-22-34	10-22-36	11-21-30	12-22-31	11-26-35	12-28-36	<10-27-39	10-28-40	11-30-40	12-31-41
VA Vertikalna verzija za montažu na zid (osnovna maska)													
	Mod.	FXE-VA 131S	FXE-VA 231S	FXE-VA 331S	FXE-VA 431S	FXE-VA 531S	FXE-VA 631S	FXE-VA 731S	FXE-VA 831S	FXE-VA 931S	FXE-VA 1031S	FXE-VA 1131S	FXE-VA 1231S
	(*) kg L x H x S	115,0 670 x 520 x 220	15,5 670 x 520 x 220	18,5 870 x 520 x 220	19,3 870 x 520 x 220	25,0 1.070 x 520 x 220	26,0 1.070 x 520 x 220	28,1 1.270 x 520 x 220	29,6 1.270 x 520 x 220	31,4 1.470 x 520 x 220	32,9 1.470 x 520 x 220	35,1 1.670 x 520 x 220	38,6 1.670 x 520 x 220
VB Vertikalna verzija za montažu na pod (maska sa rešetkom za usis vazduha sa prednje strane)													
	Mod.	FXE-VB 131S	FXE-VB 231S	FXE-VB 331S	FXE-VB 431S	FXE-VB 531S	FXE-VB 631S	FXE-VB 731S	FXE-VB 831S	FXE-VB 931S	FXE-VB 1031S	FXE-VB 1131S	FXE-VB 1231S
	(*) kg L x H x S	15,3 670 x 520 x 220	15,8 670 x 520 x 220	19,0 870 x 520 x 220	19,8 870 x 520 x 220	25,7 1.070 x 520 x 220	26,7 1.070 x 520 x 220	29,0 1.270 x 520 x 220	30,5 1.270 x 520 x 220	32,5 1.470 x 520 x 220	34,0 1.470 x 520 x 220	36,4 1.670 x 520 x 220	39,9 1.670 x 520 x 220
HA Horizontalna verzija za plafonsku montažu (osnovna maska)													
	Mod.	FXE-HA 131S	FXE-HA 231S	FXE-HA 331S	FXE-HA 431S	FXE-HA 531S	FXE-HA 631S	FXE-HA 731S	FXE-HA 831S	FXE-HA 931S	FXE-HA 1031S	FXE-HA 1131S	FXE-HA 1231S
	(*) kg L x H x S	16,2 670 x 520 x 220	16,7 670 x 520 x 220	20,1 870 x 520 x 220	20,9 870 x 520 x 220	27,0 1.070 x 520 x 220	28,0 1.070 x 520 x 220	30,5 1.270 x 520 x 220	32,0 1.270 x 520 x 220	34,2 1.470 x 520 x 220	35,7 1.470 x 520 x 220	38,3 1.670 x 520 x 220	41,8 1.670 x 520 x 220
HB Horizontalna verzija za plafonsku montažu (maska sa rešetkom za usis vazduha sa prednje strane)													
	Mod.	FXE-HB 131S	FXE-HB 231S	FXE-HB 331S	FXE-HB 431S	FXE-HB 531S	FXE-HB 631S	FXE-HB 731S	FXE-HB 831S	FXE-HB 931S	FXE-HB 1031S	FXE-HB 1131S	FXE-HB 1231S
	(*) kg L x H x S	16,5 670 x 520 x 220	17,0 670 x 520 x 220	20,6 870 x 520 x 220	21,4 870 x 520 x 220	27,7 1.070 x 520 x 220	28,7 1.070 x 520 x 220	31,4 1.270 x 520 x 220	32,9 1.270 x 520 x 220	35,3 1.470 x 520 x 220	36,8 1.470 x 520 x 220	39,6 1.670 x 520 x 220	43,1 1.670 x 520 x 220
CA Vertikalna ugradna verzija (osnovna; bez maske)													
	Mod.	FXE-CA 131S	FXE-CA 231S	FXE-CA 331S	FXE-CA 431S	FXE-CA 531S	FXE-CA 631S	FXE-CA 731S	FXE-CA 831S	FXE-CA 931S	FXE-CA 1031S	FXE-CA 1131S	FXE-CA 1231S
	(*) kg L x H x S	12,2 450 x 450 x 215	12,7 450 x 450 x 215	15,6 650 x 450 x 215	16,4 650 x 450 x 215	22,0 850 x 450 x 215	23,0 850 x 450 x 215	25,0 1.050 x 450 x 215	26,5 1.050 x 450 x 215	28,2 1.250 x 450 x 215	29,7 1.250 x 450 x 215	31,8 1.450 x 450 x 215	35,3 1.450 x 450 x 215
CB Vertikalna ugradna verzija (usis vazduha sa prednje strane; bez maske)													
	Mod.	FXE-CB 131S	FXE-CB 231S	FXE-CB 331S	FXE-CB 431S	FXE-CB 531S	FXE-CB 631S	FXE-CB 731S	FXE-CB 831S	FXE-CB 931S	FXE-CB 1031S	FXE-CB 1131S	FXE-CB 1231S
	(*) kg L x H x S	12,1 450 x 450 x 215	12,6 450 x 450 x 215	15,5 650 x 450 x 215	16,3 650 x 450 x 215	21,9 850 x 450 x 215	22,9 850 x 450 x 215	24,8 1.050 x 450 x 215	26,3 1.050 x 450 x 215	28,0 1.250 x 450 x 215	29,5 1.250 x 450 x 215	31,6 1.450 x 450 x 215	35,1 1.450 x 450 x 215
CH Horizontalna ugradna verzija (osnovna; bez maske) - Kosno nadole izvlačenje filtera, usis vazduha NIJE za kanalisanje													
	Mod.	FXE-CH 131S	FXE-CH 231S	FXE-CH 331S	FXE-CH 431S	FXE-CH 531S	FXE-CH 631S	FXE-CH 731S	FXE-CH 831S	FXE-CH 931S	FXE-CH 1031S	FXE-CH 1131S	FXE-CH 1231S
	(*) kg L x H x S	12,6 545 x 450 x 215	13,1 545 x 450 x 215	16,0 745 x 450 x 215	16,8 745 x 450 x 215	22,4 945 x 450 x 215	23,4 945 x 450 x 215	25,4 1.145 x 450 x 215	26,9 1.145 x 450 x 215	28,6 1.345 x 450 x 215	30,1 1.345 x 450 x 215	32,2 1.545 x 450 x 215	35,7 1.545 x 450 x 215
CK Horizontalna ugradna verzija (usis vazduha sa prednje strane; bez maske)													
	Mod.	FXE-CK 131S	FXE-CK 231S	FXE-CK 331S	FXE-CK 431S	FXE-CK 531S	FXE-CK 631S	FXE-CK 731S	FXE-CK 831S	FXE-CK 931S	FXE-CK 1031S	FXE-CK 1131S	FXE-CK 1231S
	(*) kg L x H x S	12,5 545 x 450 x 215	13,0 545 x 450 x 215	15,9 745 x 450 x 215	16,7 745 x 450 x 215	22,3 945 x 450 x 215	23,3 945 x 450 x 215	25,2 1.145 x 450 x 215	26,7 1.145 x 450 x 215	28,4 1.345 x 450 x 215	29,9 1.345 x 450 x 215	32,0 1.545 x 450 x 215	35,5 1.545 x 450 x 215

- (*) kg = Neto težina (samo jedinica, bez pakovanja)
- L x H x S = Dužina x Visina x Dubina (dimenzije u mm)



SMGS DOO

Profesionalna rešenja za ventilaciju i klimatizaciju

Gavrila Principa 11
Novi Sad,
Srbija

Tel: +381 21 6616 539
Tel/Fax: +381 21 6616 467

info@smgs.rs

Posetite naš website
www.smgs.rs

